



EVERCOM®
COMMUNICATION




The World Wide Lead Antenn



GSM Antenna

TC-201

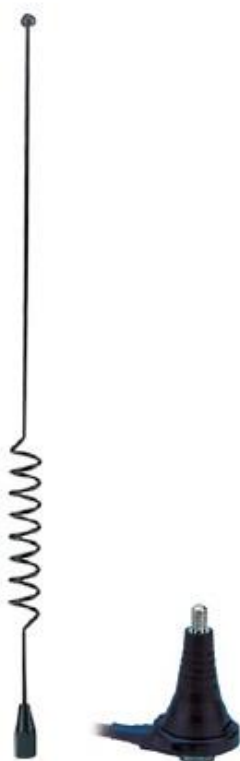

Frequency : 824-960MHZ

Gain : 3dB

Connector: FME, Mini-UHF, TNC

V.S.W.R : <1.5:1

Impedance : 50 ohm

Cable : RG58

Length: 350mm

Weight: 240g

Material : Steel/ PVC

Polarization: Vertical

Color : Black

Mounting : Roof Type

Temperature : -20°C to +60°C


EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.

Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com



ISO 9001

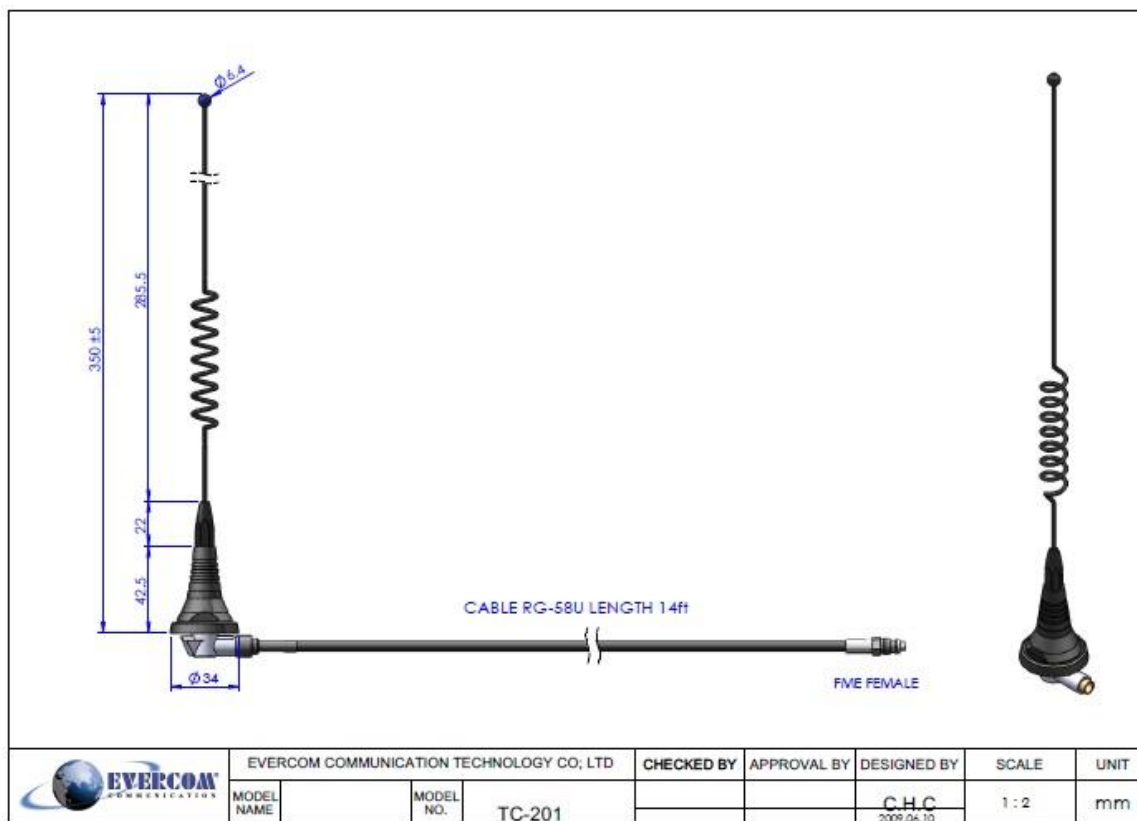


Evercom Communication Technology Co., Ltd. Frequency Inspection Report


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Evercom Communication Technology Co., Ltd.

Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [R0]

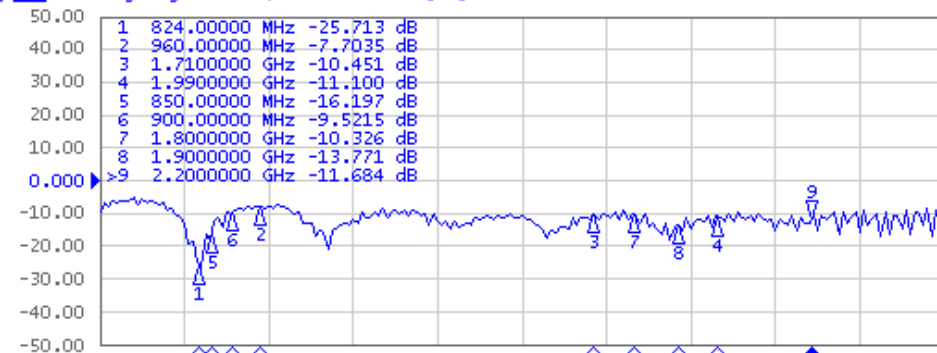

Tr2 S11 SWR 1.000/ Ref 1.000 [R0]

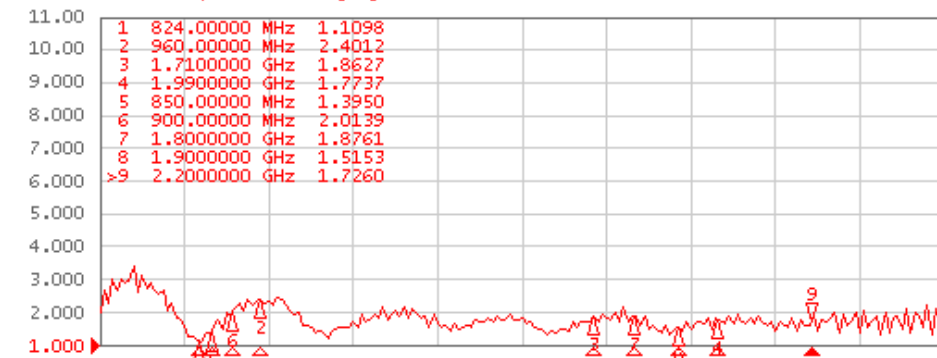

1 Start 600 MHz IFBW 70 kHz Stop 2.5 GHz Cor

Meas Stop ExtRef Ready Svc 2011-12-30 10:18

Item No. : FG-TC-201

Inspector: Amber












The World Wide Leader in Antenna

Packaging

*1 pc Antenna
PE bag/ each

50 pcs per carton
Carton Dimensions:50*30*20cm

