



The World Wide Lead Antenn



GSM Antenna

TC-8812

TC-8812



Frequency : 800/ 900/ 1800 MHZ

Gain : 3dBi

V.S.W.R : <1.5:1

Impedance: 50 ohm

Connector : FME/ F (Optional)

Cable : RG58 (Optional)

Material : ABS Polymer

Weight: ≈ 140g

Color: Black

Polarization: Linear (H) or (V)

Mount: 3M Tape

Temperature:-20°C to +60°C


Max. Power: 25W

Dimension: ø111.5 x 59mm

EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.

Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com

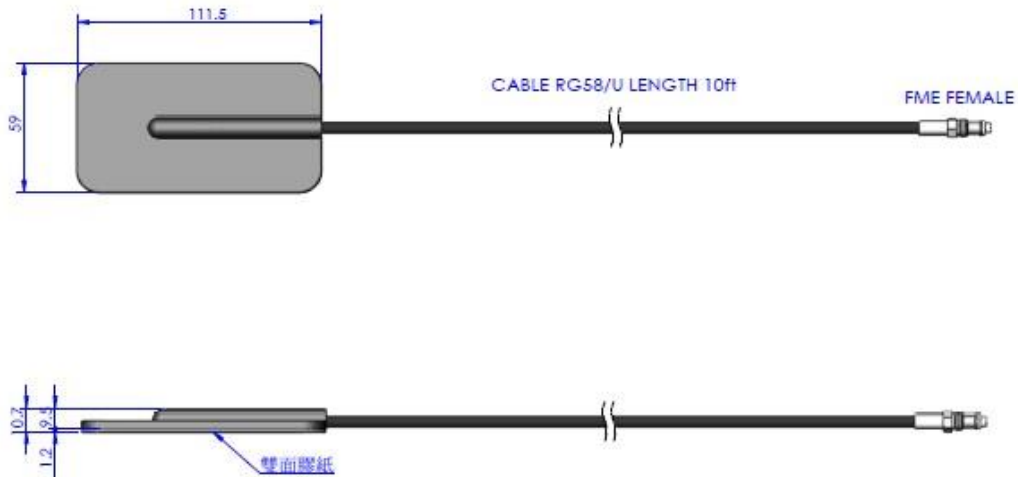


EVERCOM COMMUNICATION TECHNOLOGY CO., LTD		CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
MODEL NAME	MODEL NO.	TC-8812		C.H.C	1 : 2	mm
				2012.04.13		


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Evercom Communication Technology Co.,Ltd.

Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [R0]

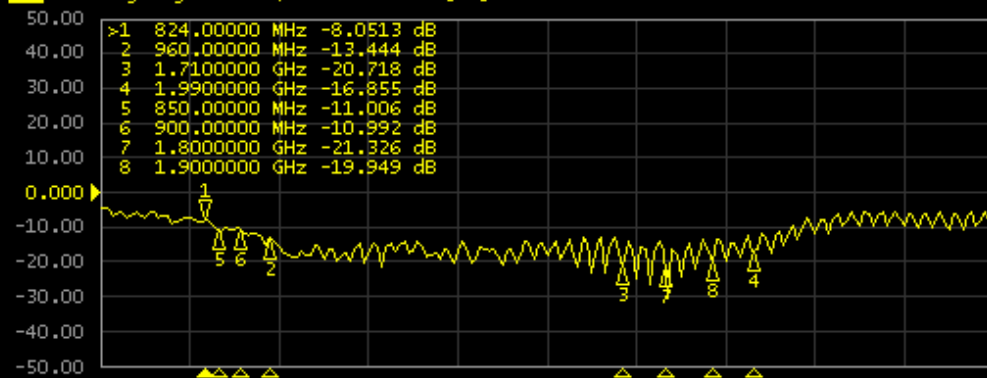

Tr2 S11 SWR 1.000/ Ref 1.000 [R0]

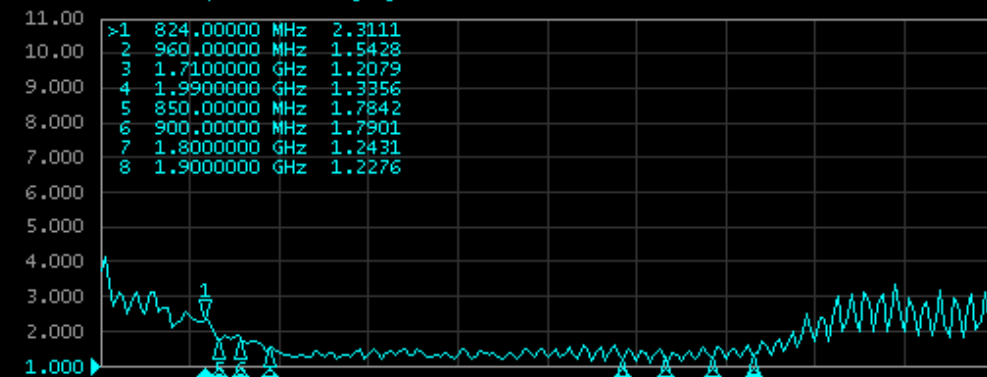

1 Start 600 MHz IFBW 70 kHz Stop 2.5 GHz Cor

Meas Stop ExtRef Ready Svc 2012-06-26 15:25

System

Print

Abort Printing

Printer Setup...

Invert Image
ON

Dump
Screen Image...

Multiport Test Set
Setup

Misc Setup

Backlight
ON

Firmware
Revision



The World Wide Leader in Antenna

Packaging

***1 pc Antenna
PE bag/ each**

**50 pcs per carton
Carton Dimensions:50*30*20cm**

