



The World Wide Lead Antenn



# GSM Antenna

## TC-8814



Frequency : 900/ 1800/ 1900 MHZ

Gain : 3dBi

V.S.W.R : <1.5:1

Impedance: 50 ohm

Connector : FME/F (Optional)

Cable : RG174 (Optional)

Material : ABS Polymer

Weight:  $\approx$  64g

Color: Black

Polarization: Linear (H) or (V)

Mount: 3M Tape

Temperature:-20°C to +60°C


Max. Power: 25W

Dimension:  $\varnothing$ 146 x 22.8mm

EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.

Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com

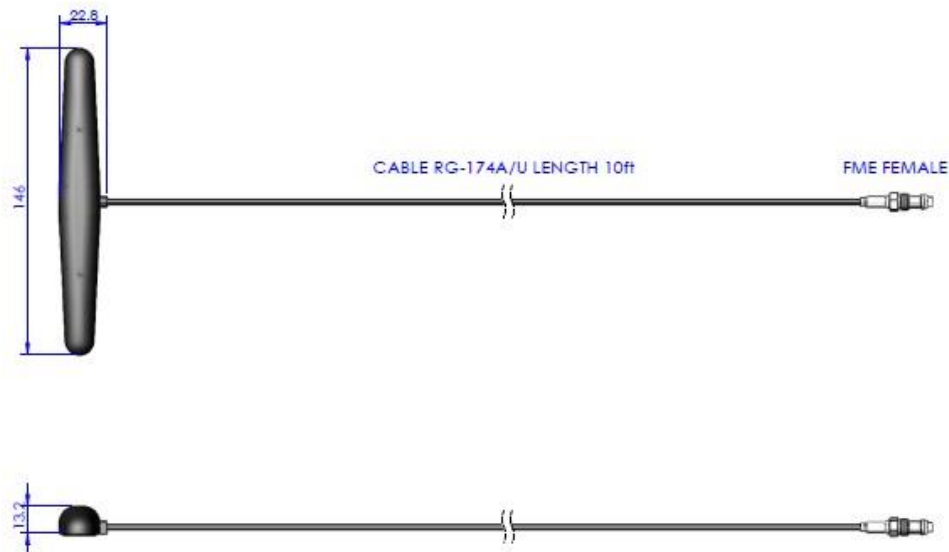


	EVERCOM COMMUNICATION TECHNOLOGY CO., LTD			CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
	MODEL NAME		MODEL NO.	TC-8814		C.H.C	1 : 2	mm
						2010.04.21		

### Evercom Communication Technology Co., Ltd. Frequency Inspection Report


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Evercom Communication Technology Co.,Ltd.

▶ Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [R0]

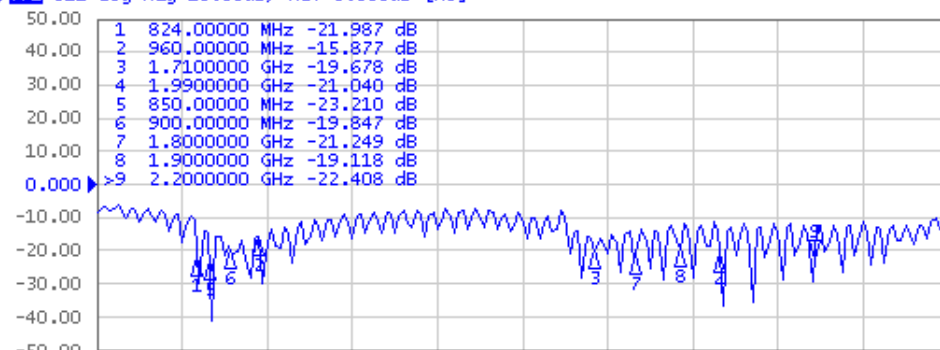

Tr2 S11 SWR 1.000/ Ref 1.000 [R0]

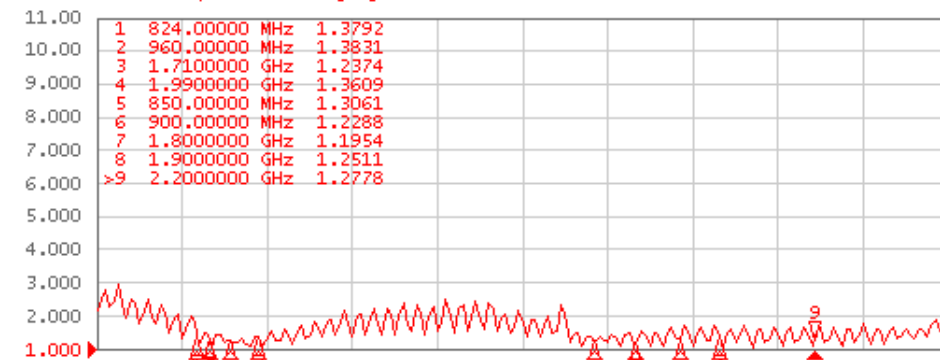

1 Start 600 MHz IFBW 70 kHz Stop 2.5 GHz Cor I

Meas Stop ExtRef Ready Svc 2012-09-21 08:51

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump Screen Image...

Multipoint Test Set Setup

Misc Setup

Backlight

ON

Firmware

Revision

Item No. : FG-TC-8814

Inspector: Amber



*The World Wide Leader in Antenna*

# Packaging

**\*1 pc Antenna  
PE bag/ each**

**100 pcs per carton  
Carton Dimensions:50\*30\*20cm**

