



The World Wide Lead Antenn



# GSM Antenna

## TC-8821



Frequency : 900/ 1800/ 2100 MHZ

Gain : 3dBi

Connector : FME/ F (Optional)

V.S.W.R : <1.5:1

Impedance : 50 ohm

Cable : RG174 (Optional)

Weight : 50g

Material : ABS Polymer

Polarization : Linear (H) or (V)

Color : Black

Mount : 3M Tape

Temperature : -20°C to +60°C

Max. Power : 50W

Dimension:  $\varnothing$ 106 x 14.8mm


**EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.**

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.

Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: [service@evercomtech.com](mailto:service@evercomtech.com)



ISO 9001

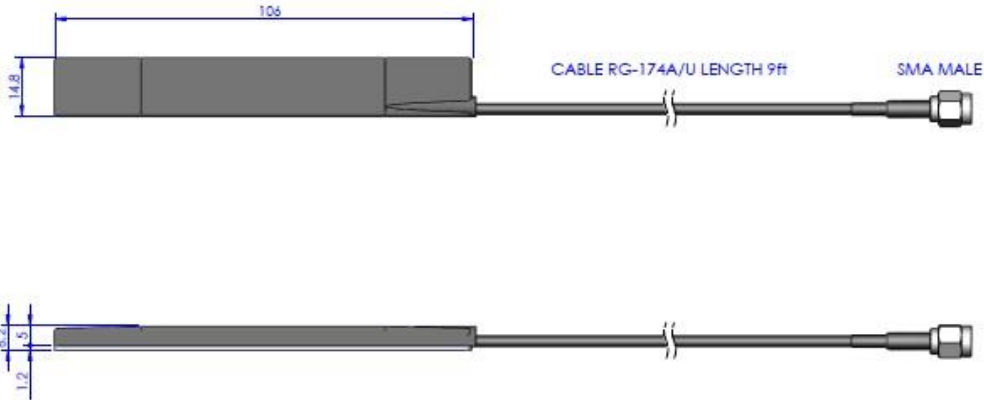

EVERCOM COMMUNICATION TECHNOLOGY CO., LTD		CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
MODEL NAME		MODEL NO.	TC-8821SMA-M	C.H.C	1:1	mm
				2010.04.13		

### Evercom Communication Technology Co., Ltd. Frequency Inspection Report


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Evercom Communication Technology Co.,Ltd.

▶ Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [R0]



Tr2 S11 SWR 1.000/ Ref 1.000 [R0]

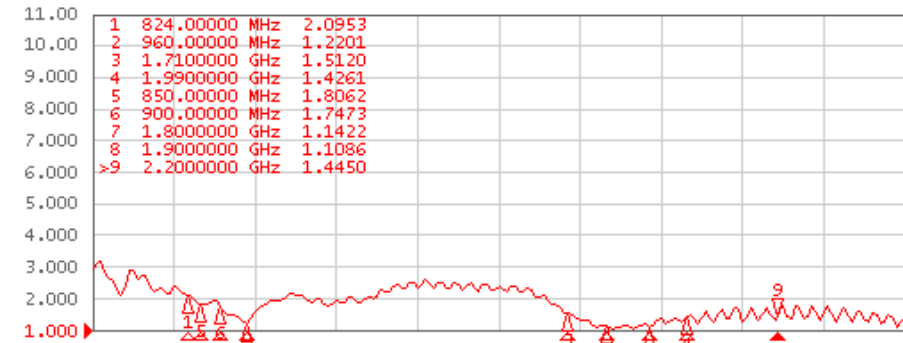

1 Start 600 MHz IFBW 70 kHz Stop 2.5 GHz Cor |

Meas Stop ExtRef Ready Svc 2014-06-05 09:07

Item No. : FC-TC-8821SMA-M

Inspector: Amber



The World Wide Leader in Antenna

# Packaging

\*1 pc Antenna  
PE bag/ each

100 pcs per carton  
Carton Dimensions:40\*30\*20cm

