



The World Wide Lead Antenn



GSM Antenna

TC-8823



Frequency: 900/ 1800/ 2200 MHZ

Gain : 2.15dBi

Connector : SMA/Male (Optional)

V.S.W.R : <1.5:1

Impedance: 50 ohm

Cable : RG174 (Optional)

Weight: 60g

Material : ABS Polymer

Polarization: Linear (H) or (V)

Color: Black

Mount: 3M Tape


Temperature: -20°C to +60°C

Dimension: ϕ 104 x 12mm

EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.


Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com

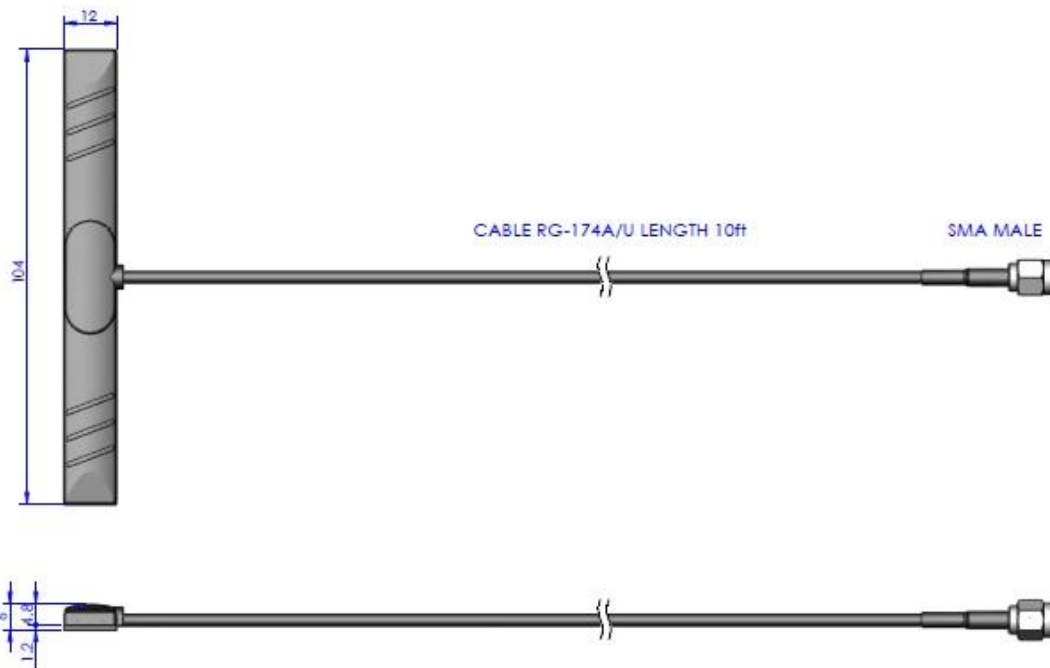

	EVERCOM COMMUNICATION TECHNOLOGY CO., LTD			CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
	MODEL NAME	MODEL NO.	TC-8823SMA-M3			C.H.C 2010.04.20	1 : 1	mm

Evercom Communication Technology Co., Ltd. Frequency Inspection Report

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

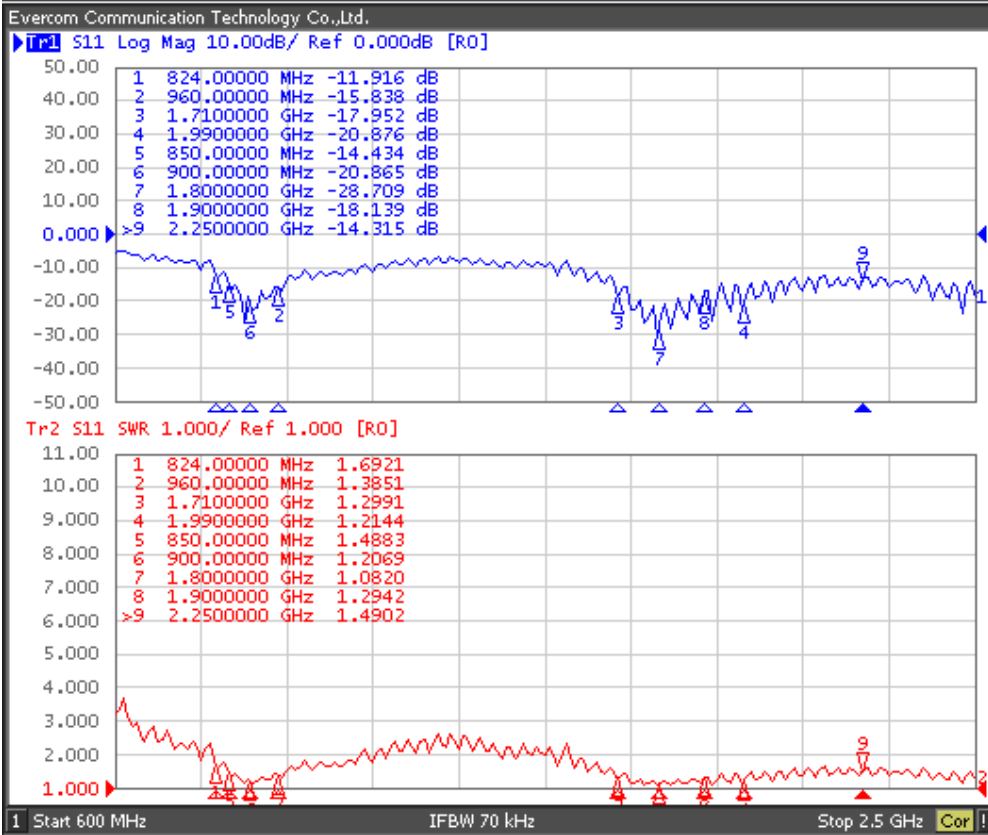

System

Print

Abort Printing

Printer Setup...

Invert Image
ON

Dump Screen Image...

Multiport Test Set Setup

Misc Setup

Backlight
ON

Firmware Revision

Meas Stop ExtRef Ready Svc 2016-06-20 15:50

Item No. : FG-TC-8823SMA-M3

Inspector: Amber



The World Wide Leader in Antenna

Packaging

***1 pc Antenna
PE bag/ each**

**100 pcs per carton
Carton Dimensions:40*30*20cm**

