



WIFI-6E Antenna

TRB-TC-223




Frequency : 2400/5800/7125MHz
Gain : 2~3dBi
Connector : SMA/M (Optional)
V.S.W.R : <2:1
Impedance : 50 ohm
Cable : RG174/U or LMR100 3M (Optional)
Dimension : 97 x 34 mm
Weight : 500g
Material : ABS/COPPER
Polarization : Linear (V or H)
Color : Black
Mounting : Screw + EVA Foam Tape
Temperature : -20°C to +75°C
Max. Power : 30W

EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.
 No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.
 Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com




DATE	DESCRIPTION	REV
2022.01.06	First drawing	A

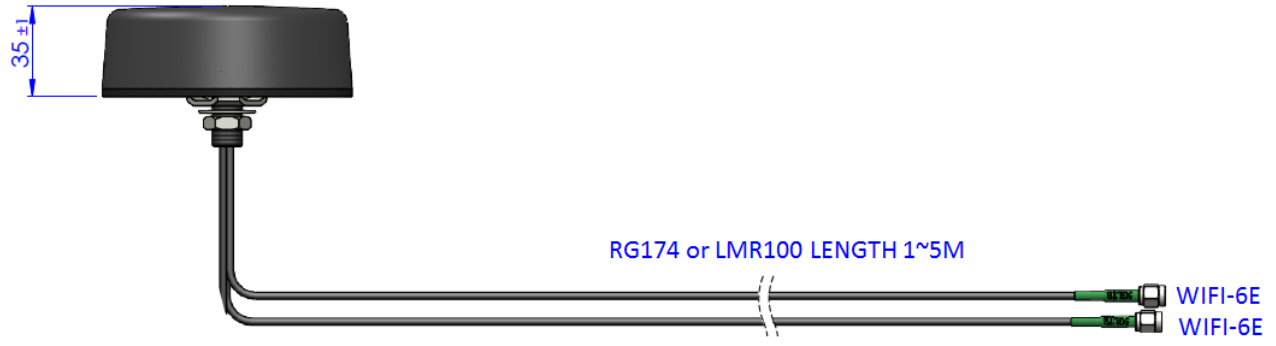


	EVERCOM COMMUNICATION TECHNOLOGY CO.; LTD		CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
	MODEL NO.				Y.W.C 2022.01.06	1:2	mm

VSWR-WIFI-6E→RG-174/3M+SMA/M

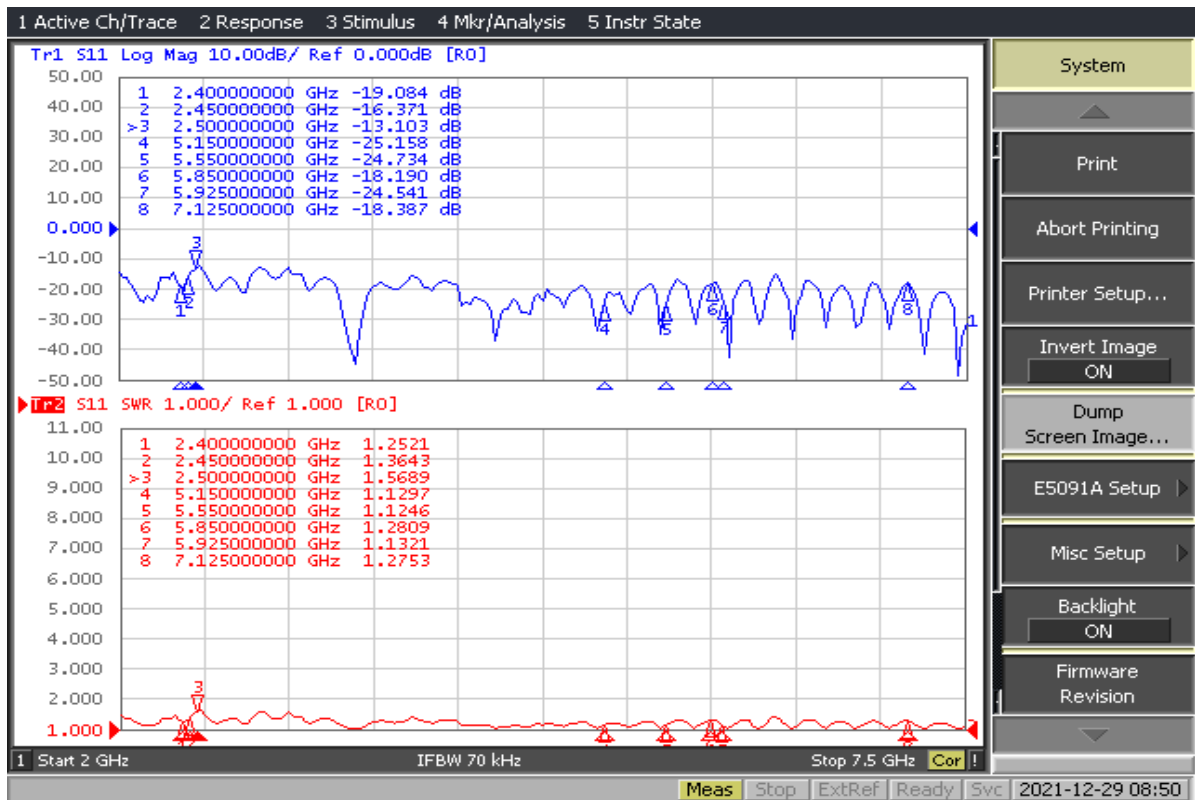


VSWR-WIFI-6E→RG-174/3M+SMA/M

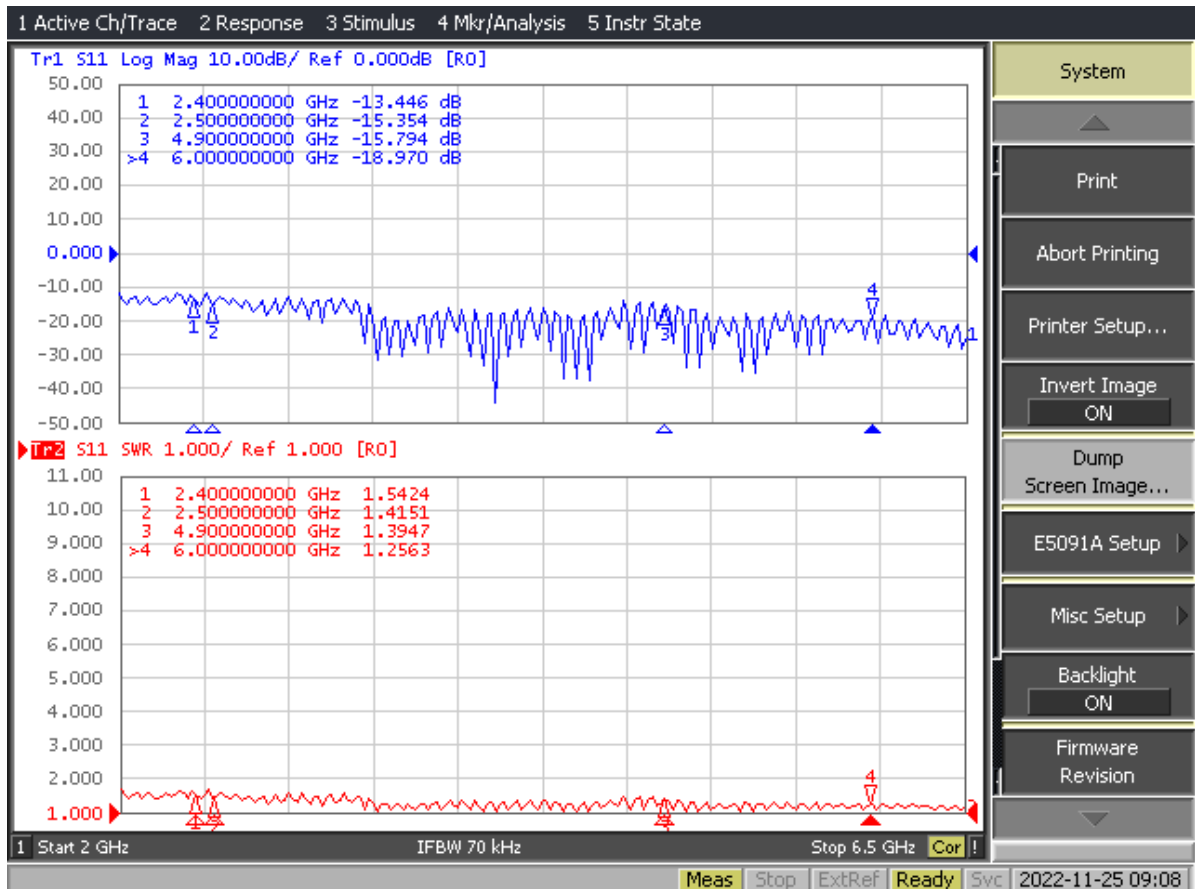



Packaging

Antenna pack in a poly bag

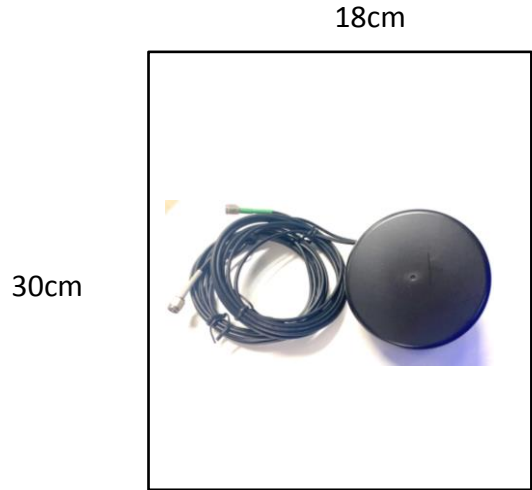

50 PCS Per Carton
Carton Dimensions:50*40*20cm

