



The World Wide Leader in Antenna

GSM Antenna

TU-7308COL



Frequency : 890~980/ 1710~2150/ 2600 MHZ

Gain : 5dBi

Connector : CRC9 (Optional)

V.S.W.R : <1.5:1

Impedance: 50 ohm

Cable : RG174 (Optional)

Length: 200mm

Weight: 140g

Material : ABS/ Steel

Polarization: Vertical

Color: Black

Mount: Magnet Type

Temperature: -30°C to +60°C

Max. Power: 50W

EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.



Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com



EVERCOM COMMUNICATION TECHNOLOGY CO.; LTD			CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
MODEL NAME	MODEL NO.	TU-7308COL/CRC9-M3			C.H.C 2012.08.15	1 : 1.5	mm

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Evercom Communication Technology Co.,Ltd.

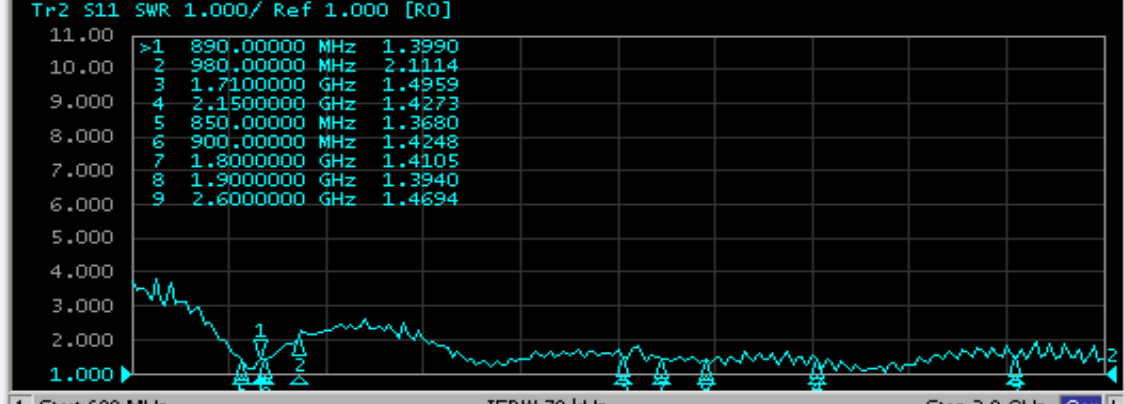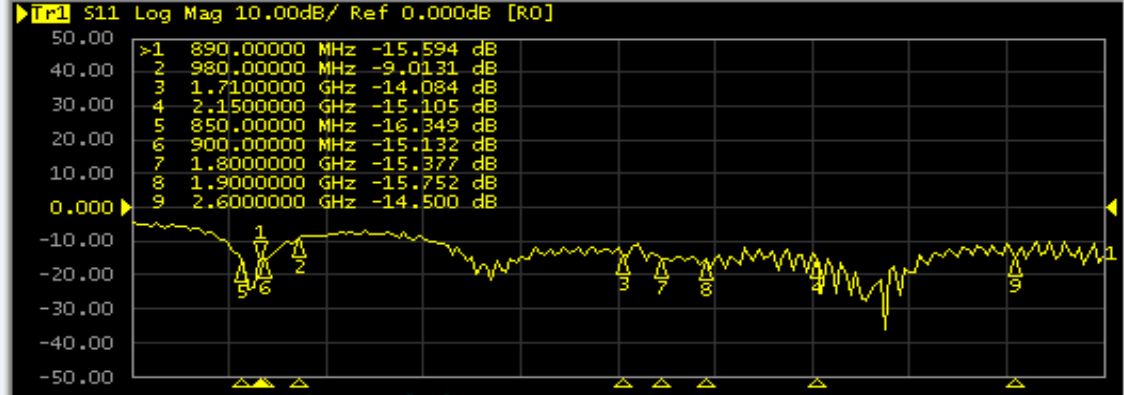

1 Start 600 MHz IFBW 70 kHz Stop 2.8 GHz Cor !

System

Print

Abort Printing

Printer Setup...

Invert Image
ON

Dump Screen Image...

Multiport Test Set Setup

Misc Setup

Backlight
ON


Firmware Revision



The World Wide Leader in Antenna

Packaging

***1 pc Antenna
PE bag/ each**

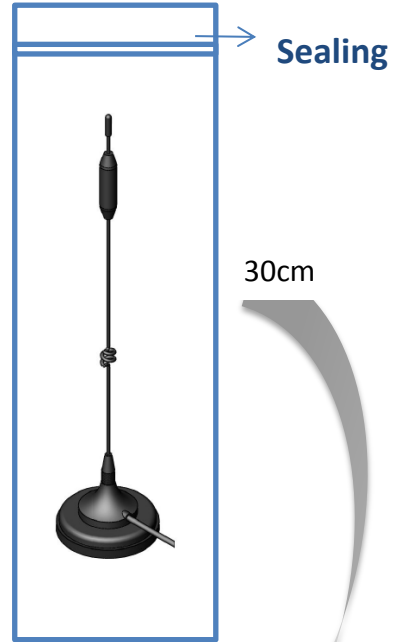

**50 pcs per carton
Carton Dimensions:40*30*20cm**

