



4G LTE

4G LTE Antenna

UMB-TC-95

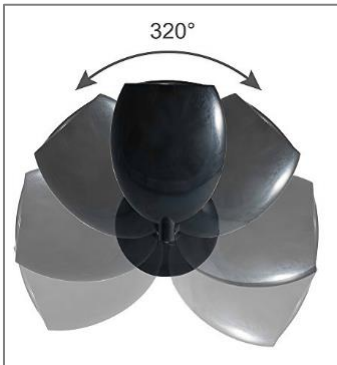

Frequency : 700~2700MHZ

Gain : 4dBi

Connector : SMA/Male (Optional)

V.S.W.R : <1.5:1

Impedance : 50ohm

Cable : RG174 (Optional)

Weight : 130g

Material : ABS Polymer

Polarization: Linear (H) or (V)

Color: Black or White (Optional)

Mount : Desktop



Temperature: -20°C to +65°C

Max. Power: 50W

© 2016 EVERCOM COMMUNICATION TECHNOLOGY CO., LTD.


No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.

Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com

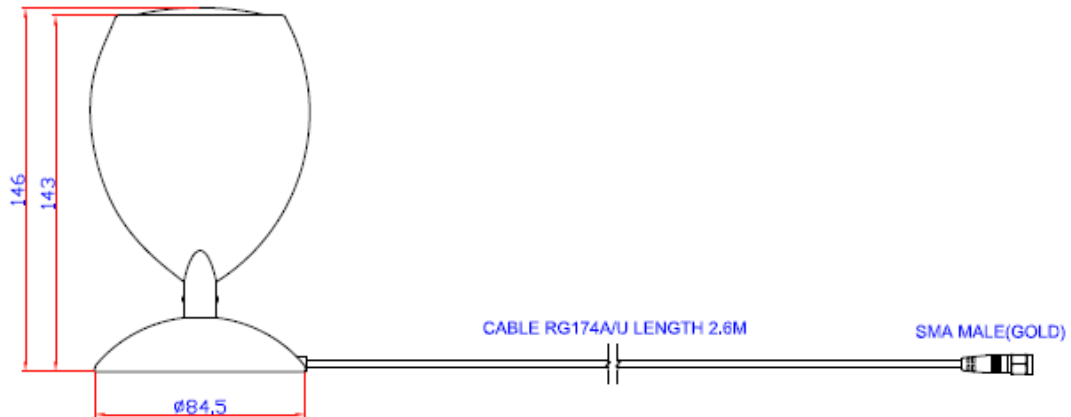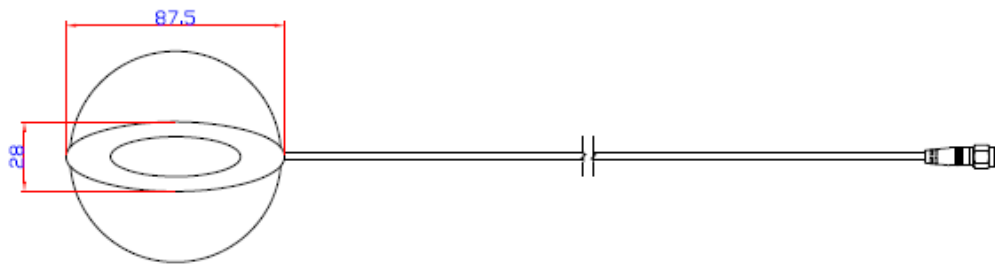

EVERCOM COMMUNICATION TECHNOLOGY CO., LTD.			CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
MODEL NAME	MODEL NO.	UMB-TC08SMA/M/G1-LTE			C.H.C	1:2	mm
					2015.08.19		

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

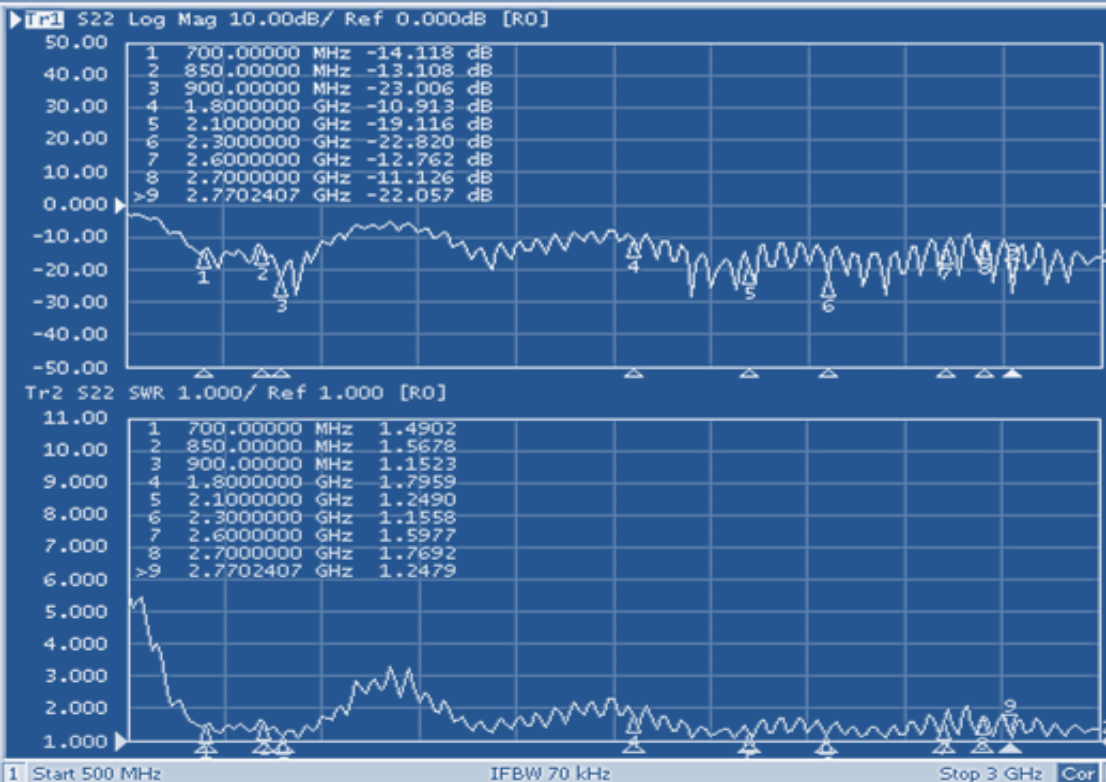

System

Print

Abort Printing

Printer Setup...

Invert Image ON

Dump Screen Image...

Multiport Test Set Setup

Misc Setup

Backlight ON

Firmware Revision

4G LTE

Antenna Applications



