EVERCOM COMMUNICATION

Antennas

For CB, UHF/VHF, BS, DVB-T, Mount, Accessories, Connectors

www.evercomtech.com

INDEX

CB Antenna
P1~P11

UHF/VHF
P12~P21

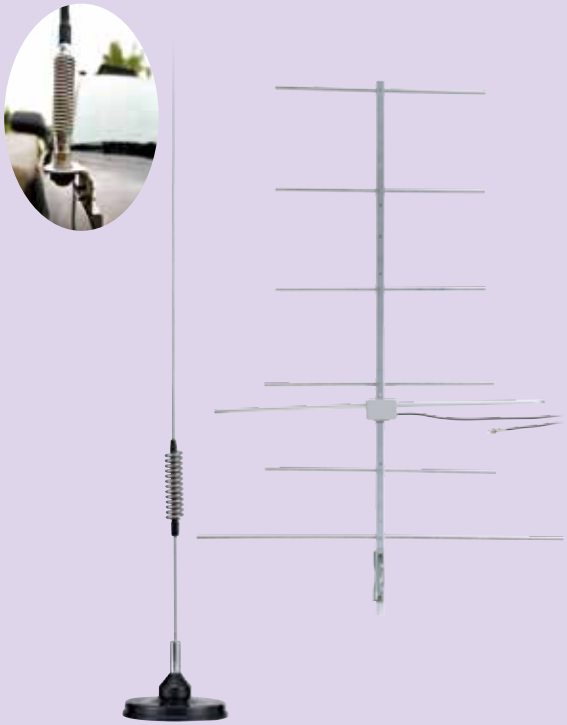

Base Station Antenna

P22~P24

DVBT

P25~P27

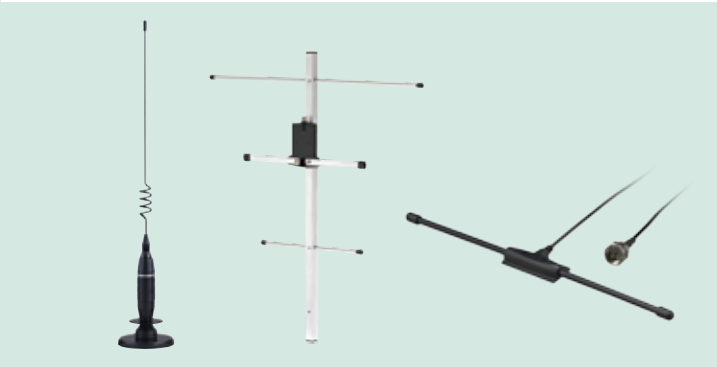

Mount

Magnetic Mount
P28~P29

Trunk Mount
P30

Bumper Mount
P30

Gutter Mount
P31

Accessories
P32~P34

Connectors
P35

Fabricating CB Antennas
P36

CB Antenna

CB

	CB-631NE	CB-632NE	CB-633NE	CB-635NE	CB-636NE
Frequency	26~28MHZ	26~28MHZ	26~28MHZ	26~28MHZ	26~28MHZ
V.S.W.R.	<1.5:1	<1.5:1	<1.5:1	<1.5:1	<1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	500W	500W	500W	500W	500W
Length	1.45m	1.45m	1.45m	1.45m	1.46m
Weight	510g	510g	510g	510g	500g
Mounting	Ø10mm, "NE"	Ø10mm, "NE"	Ø10mm, "NE"	Ø10mm, "NE"	Ø10mm, "NE"

CB Antenna

NE mount chrome
Mounting hole: Ø10mm
Overall size: Ø36mm

AC-9401
Truck Holder

	CB-2321NE	CB-2322NE	CB-2310	CB-2350NE	CB-R901
Frequency	26~28MHZ	26~28MHZ	25~30MHZ	27~28.5MHZ	27MHZ
V.S.W.R.	<1.2:1	<1.2:1	<1.1:1	<1.5:1	<1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	200W	200W	300W	500W	250W
Length	1.40m	1.48m	1.90m	1.58m	1.87m
Weight	520g	470g	450g	650g	580g
Mounting	Ø10mm, "NE"	Ø10mm, "NE"	Ø10mm, "NE"	Ø10mm, "NE"	AC-9401

CB Antenna

CB

NP mount chrome
Mounting hole: Ø12.5mm
Overall size: Ø36mm

	CB-2315NP	CB-2316NP	CB-2319NP	CB-2328NP	CB-2329NP
Frequency	26~28MHZ	26~28MHZ	26~28MHZ	26~28.5MHZ	26~28MHZ
V.S.W.R.	<1.5:1	<1.5:1	1.2:1	1.5:1	1.2:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	200W	250W	200W	200W	200W
Length	1.38m	1.35m	0.92m	1.30m	1.57m
Weight	470g	350g	520g	250g	510g
Mounting	Ø12.5mm, "NP"	Ø12.5mm, "NP"	Ø12.5mm, "NP"	Ø12.5mm, "NP"	Ø12.5mm, "NP"

CB Antenna

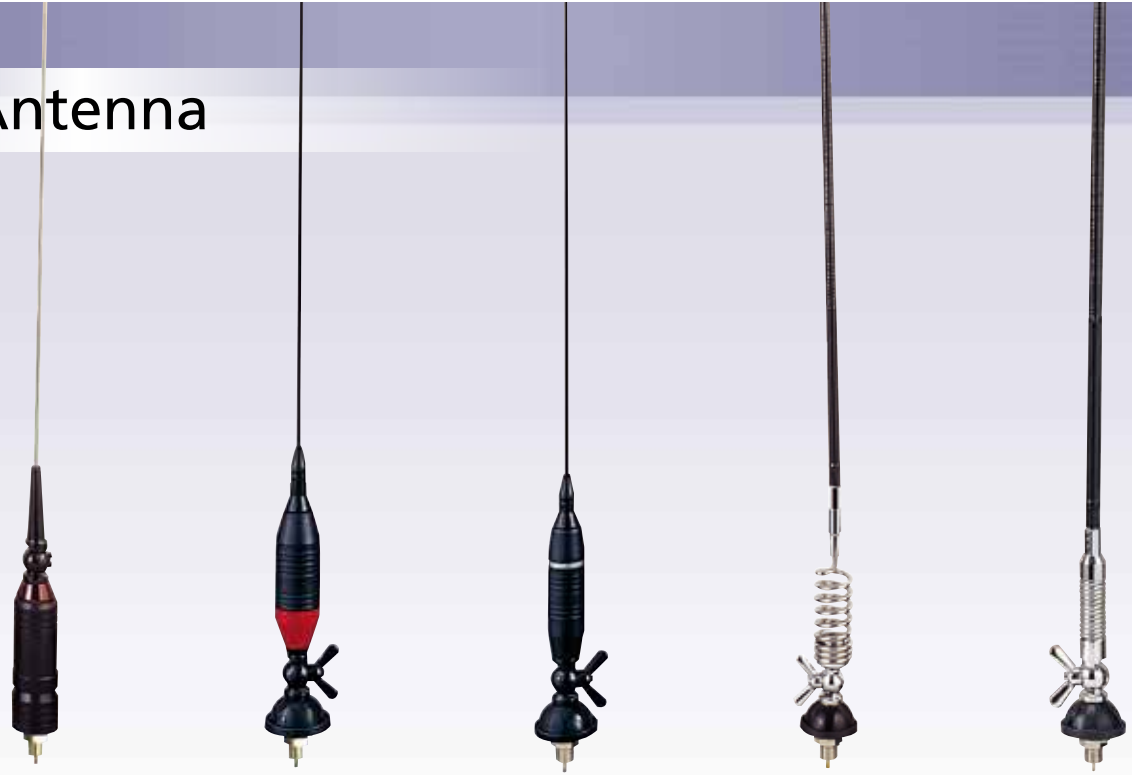

	CB-2330NP	CB-2335NP	CB-2336NP	CB-58NP	CB-59NP
Frequency	26~28MHZ	26~28MHZ	26~28MHZ	26~28MHZ	26~28MHZ
V.S.W.R.	1.2:1	1.2:1	1.2:1	1.2:1	1.2:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	200W	200W	150W	200W	200W
Length	1.57m	1.45m	1.00m	0.98m	0.95m
Weight	500g	480g	400g	380g	480g
Mounting	Ø12.5mm, "NP"	Ø12.5mm, "NP"	Ø12.5mm, "NP"	Ø12.5mm, "NP"	Ø12.5mm, "NP"

CB Antenna

CB

	CB-2338NP	CB-2351NP	CB-2352FX-TF	CB-3101BM	CB-238
Frequency	26~28MHZ	26~28MHZ	26.925~27.405MHZ	26~28MHZ	26~28MHZ
V.S.W.R.	<1.5:1	<1.5:1	<1.5:1	<1.5:1	1.1:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	200W	150W	200W	50W	500W
Length	1.60m	0.66m	0.58m	0.60m	1.58m
Weight	640g	480g	470g	50g	640g
Mounting	Ø12.5mm, "NP"	Ø12.5mm, "NP"	"ROOF"	"BNC"	Ø12.5mm, "NP"

CB Antenna

	CB-2309	CB-2303	CB-2304	CB-27	CB-28	CB-29
Frequency	26~28MHZ	26~28MHZ	26~28MHZ	27MHZ	27MHZ	27MHZ
V.S.W.R.	1.1:1	1.3:1	1.5:1	1.2:1	1.3:1	1.3:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	500W	200W	200W	200W	200W	200W
Length	1.60m	1.35m	1.35m	0.73m	1.35m	1.35m
Weight	600g	600g	480g	560g	480g	480g
Mounting	Ø12.5mm, "NP"	Ø12.5mm, "NP"	Ø12.5mm, "NP"	Ø12.5mm, "NP"	Ø12.5mm, "NP"	Ø12.5mm, "NP"

CB Antenna

CB

	CB-2301N	CB-2302N	CB-2317	CB-2318	CB-2320UP	CB-2323UP
Frequency	26~28MHZ	26~28MHZ	26~28MHZ	26~28MHZ	26~28.5MHZ	26~28MHZ
V.S.W.R.	1.2:1	1.2:1	1.5:1	1.1:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	100W	100W	150W	500W	200W	500W
Length	0.40m	0.32m	1.30m	1.53m	0.48m	1.48m
Weight	500g	500g	250g	230g	220g	240g
Mounting	Ø12.5mm, "NP"	Ø12.5mm, "NP"	M	M	M	M

CB Antenna

	CB-2331UP	CB-2332UP	CB-2308	CB-2337UP	CB-2342UP	TA-27
Frequency	26~28MHZ	26~28MHZ	26~28MHZ	26~28MHZ	26~28MHZ	27/88~108MHZ
V.S.W.R.	1.2:1	1.2:1	1.1:1	<1.5:1	<1.5:1	<1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	200W	200W	500W	500W	500W	10W
Length	1.55m	1.49m	1.53m	1.65m	1.50m	8 x 7 x 3.5cm
Weight	320g	260g	230g	420g	300g	250g
Mounting	M	M	M	M	M	

CB Antenna

CB

	CB-1346	CB-1347	EVERCOM145	MAG2304	CB-1345	CB-1348UM
Frequency	26~28MHZ	26~28MHZ	26~28MHZ	26~28MHZ	26~28MHZ	26~28MHZ
V.S.W.R.	1.2:1	1.2:1	1.2:1	1.2:1	1.2:1	1.2:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	300W	300W	500W	150W	50W	50W
Length	1.05m	1.10m	1.53m	1.30m	0.35m	0.47m
Weight	500g	550g	1.4kg	950g	400g	450g
Mounting	Magnet	Magnet	Magnet	Magnet	Magnet	Magnet

CB Antenna

	CB-1349UM	CB-40	CB-1350UM	CB-2307	CB-2307S	CB-2307N
Frequency	26~28MHZ	27MHZ	26~28MHZ	26~28MHZ	26~28MHZ	26~28MHZ
V.S.W.R.	1.2:1	1.5:1	<1.5:1	1.2:1	1.2:1	1.2:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	150W	200W	300W	1200W	1000W	1200W
Length	0.95m	1.05m	1.05m	2.00m	2.00m	2.00m
Weight	720kg	300g	500g	840g	800g	920g
Mounting	Magnet	By Screw	Magnet	Ø16mm, "SO239"	Ø16mm, "SO239"	Ø16mm, "SO239"

CB Antenna

CB

AC-PL/PL

	CB-2307M	CB-2306	CB-2306M	CB-2311	CB-2312	CB-2313
Frequency	26~28MHZ	26~28MHZ	26~28MHZ	25~30MHZ	26~28MHZ	26~28MHZ
V.S.W.R.	1.2:1	1.2:1	1.2:1	1.1:1	1.2:1	1.1:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	1200W	600W	600W	2500W	600W	600W
Length	2.00m	1.43m	1.43m	1.68m	1.9m	0.48m
Weight	920g	720g	720g	900g	1.16kg	400g
Mounting	Ø16mm, "SO239"	Ø16mm, "SO239"	Ø16mm, "SO239"	Ø16mm, "SO239"	Ø16mm, "SO239"	M

DB - VHF/UHF

	DB-1208	DB-1209	DB-1216	DB-1217	DB-1219	DB-1218
Frequency	144/430MHZ	144-146MHZ	144/430MHZ	144/430MHZ	144/430MHZ	144/430MHZ
Gain	3.5dB/5.2dB	5.2dB (144MHz)	4.3/6.8dB	5.0/7.6dB	3.2dB/5.7dB	2.15dB/3.8dB
V.S.W.R.	1.5:1	1.5:1	<1.5:1	<1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	150W	150W	150W	150W	100W	100W
Length	1.06m	1.60m	1.27m	1.58m	0.96m	0.50m
Weight	350g	400g	375g	600g	400g	280g
Mounting	"M"	"M"	"M"	"M"	"M"	"M"

DB - VHF/UHF

	DB-1201	DB-122	DB-790	DB-791	DB-1220	DB-12C
Frequency	144/430MHZ	144/430MHZ	144/430MHZ	144/430MHZ	144-146MHZ	144-146MHZ
Gain	3.0dB/5.5dB	3.0dB/5.5dB	4.5/7.2dB	3.0/5.5dB	6.5dB	6.5dB
V.S.W.R.	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	200W	200W	120W	250W	100W	150W
Length	0.98m	1.02m	1.46m	1.00m	2.46m	1.41m
Weight	250g	250g	380g	430g	500g	200g
Mounting	"M"	"M"	"M"	"M"	"M"	"M"

DB - VHF/UHF

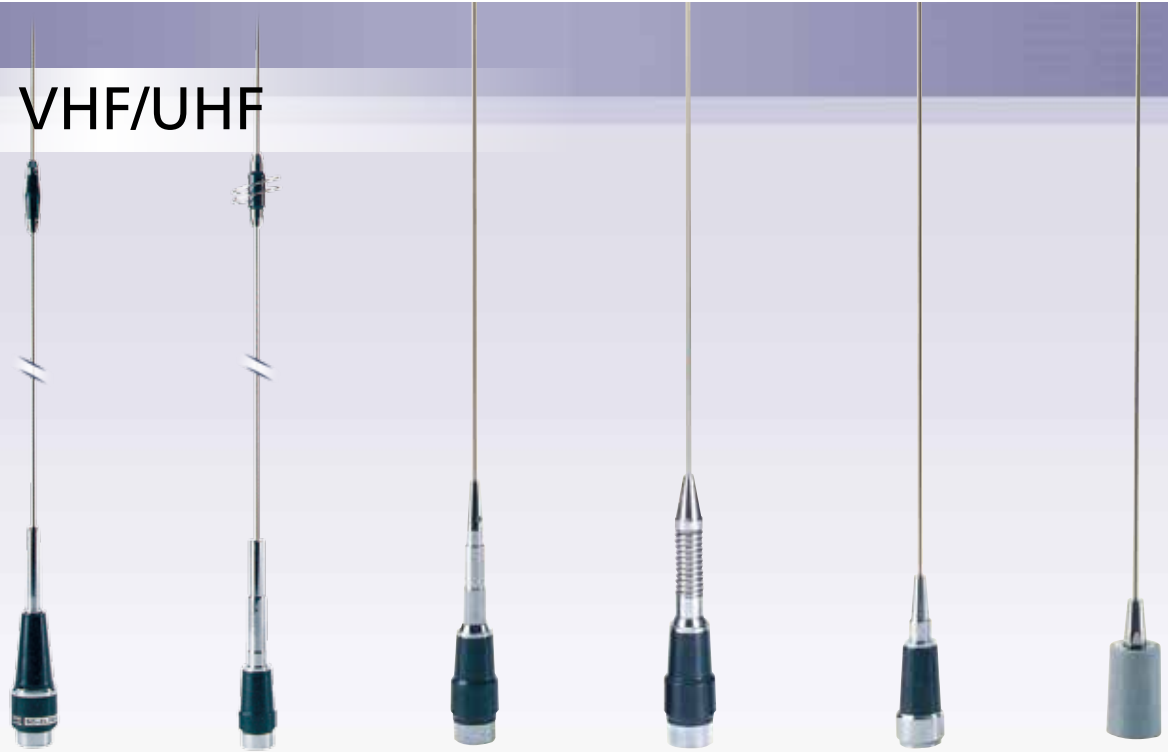

	DB-22E	DB-1221	DB-1203	DB-1203S	DB-1215	DB-115N
Frequency	144-146MHZ	144-146MHZ	144-146MHZ	144-174MHZ	139.5MHZ	132-174MHZ
Gain	4.5dB	4.1dB	3.4dB	3.5dB	3.5dB	4.0dB
V.S.W.R.	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	100W	200W	200W	200W	200W	200W
Length	1.81m	1.45m	1.33m	1.35m	1.30m	1.35m
Weight	510g	220g	200g	180g	200g	250g
Mounting	"M"	"M"	"M"	"M"	"M"	"M"

DB - VHF/UHF

	DB-115NB	DB-150N	DB-1304	DB-1211	DB-1223	DB-1225
Frequency	132-174/144MHZ	144-146MHZ	144/430MHZ	144/430MHZ	144-146MHZ	144/430MHZ
Gain	4.0dB	2.15dB	2.15dB	2.15dB/5.5dB	4.1dB	2.15dB
V.S.W.R.	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	200W	200W	50W	100W	100W	100W
Length	1.35m	0.50m	0.36m	0.43m	0.45m	0.29m
Weight	250g	110g	90g	150g	65g	90g
Mounting	"M"	"M"	"M"	"M"	"M"	"M"

DB - VHF/UHF

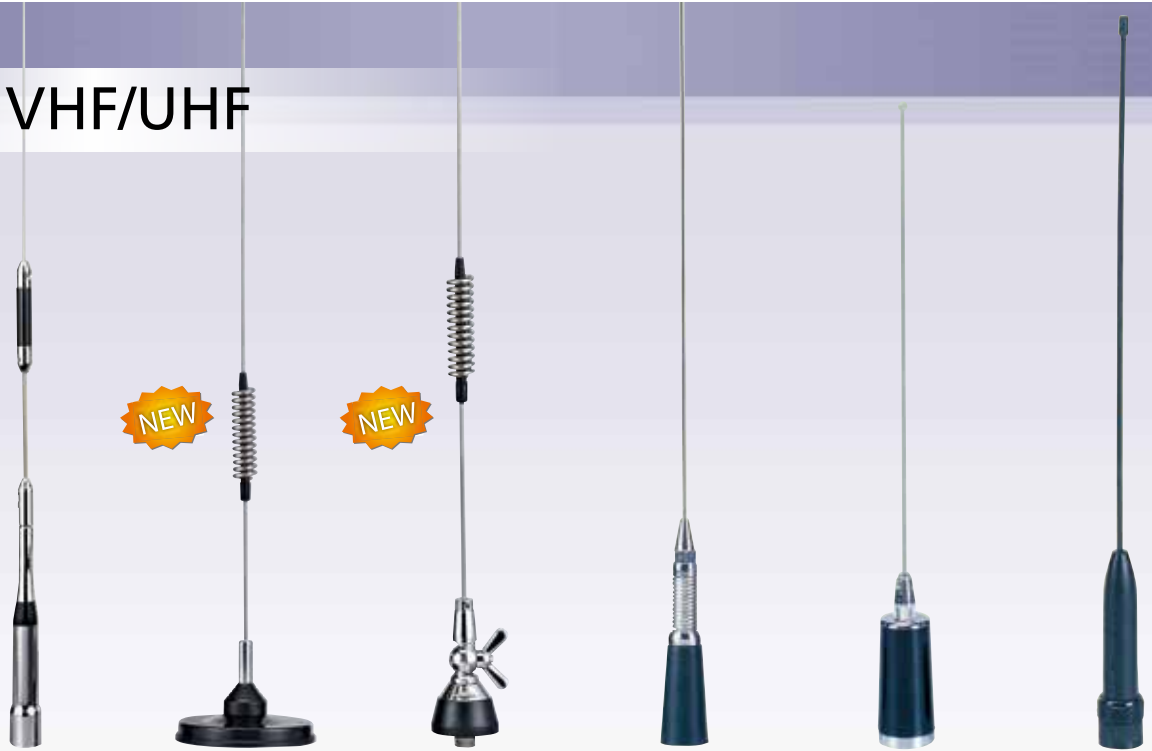

	DB-18X	DB-1351	DB-2341	DB-123	DB-450	DB-71
Frequency	144/430MHZ	368-490MHZ	368-490MHZ	132-174MHZ	450-470MHZ	144/430MHZ
Gain	2.15/4.5dB	3dB	3dB	4dB	3dB	2.15dB
V.S.W.R.	1.5:1	<1.5:1	<1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	50W	200W	200W	200W	150W	10W
Length	0.67m	0.85m	0.89m	1.30m	0.50m	0.20m
Weight	100g	650g	420g	280g	200g	17g
Mounting	"M"	"Magnet"	"ROOF"	"M"	"NMO"	"BNC"

DB - VHF/UHF

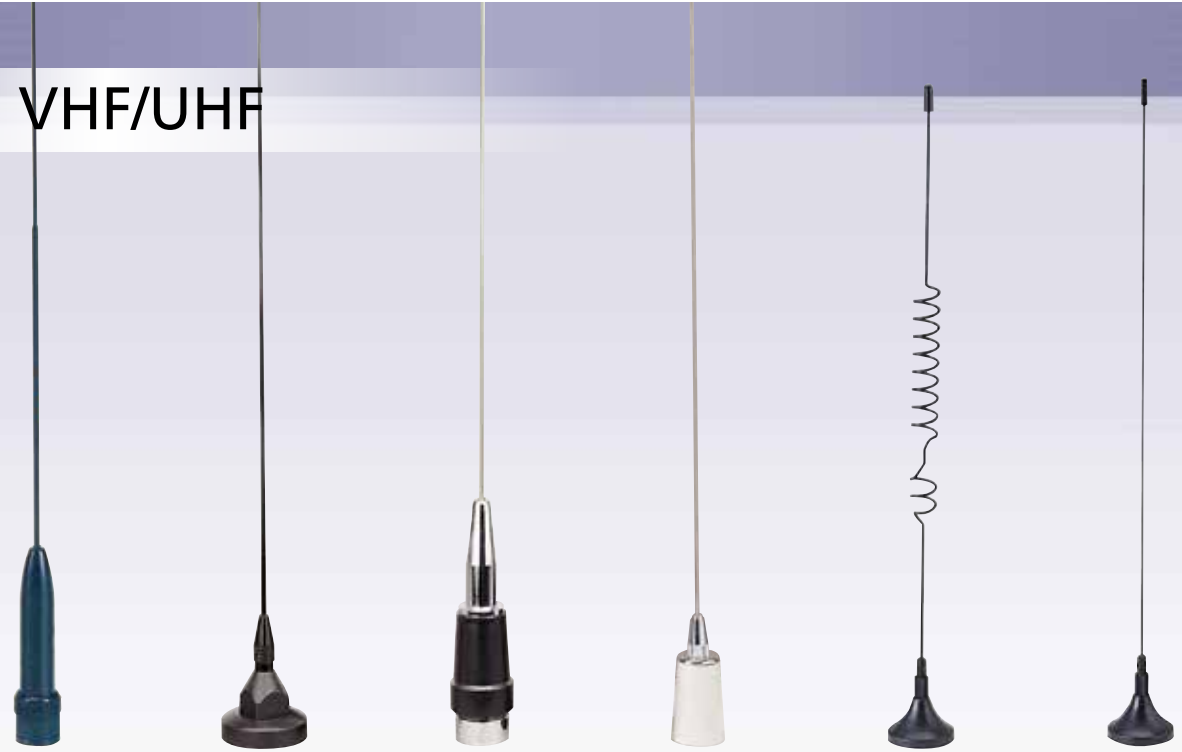

	DB-72	DB-1348	DB-201M	DB-V366W	DB-85D	DB-86D
Frequency	144/430MHZ	140-175MHZ	340-520MHZ	132-174MHZ	25-1900MHZ	138-470MHZ
Gain	2.15dB	2.15dB	4dB	4dB	2.15dB	2.15dB
V.S.W.R.	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	10W	30W	200W	200W	10W	10W
Length	0.35m	0.56m	0.58m	1.46m	0.45m	0.47m
Weight	30g	200g	160g	150g	70g	60g
Mounting	"BNC"	Magnet	"M"	NMO	Magnet	Magnet

DB - VHF/UHF

	DB-87D	DB-1410VHF	DB-1410UHF	DB-3203	DB-3206	DB-3209
Frequency	144/430MHZ	136-174MHZ	430-470MHZ	144/430MHZ	144/430MHZ	144/430MHZ
Gain	2.15dB	2.15dB	2.15dB	2.15dB	2.15dB	2.15dB
V.S.W.R.	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	10W	10W	10W	10W	10W	10W
Length	0.48m	0.65m	0.17m	0.20m	0.14m	0.40m
Weight	60g	220g	210g	30g	35g	40g
Mounting	Magnet	NMO	NMO	"BNC, TNC"	"BNC"	"BNC"

DB - VHF/UHF

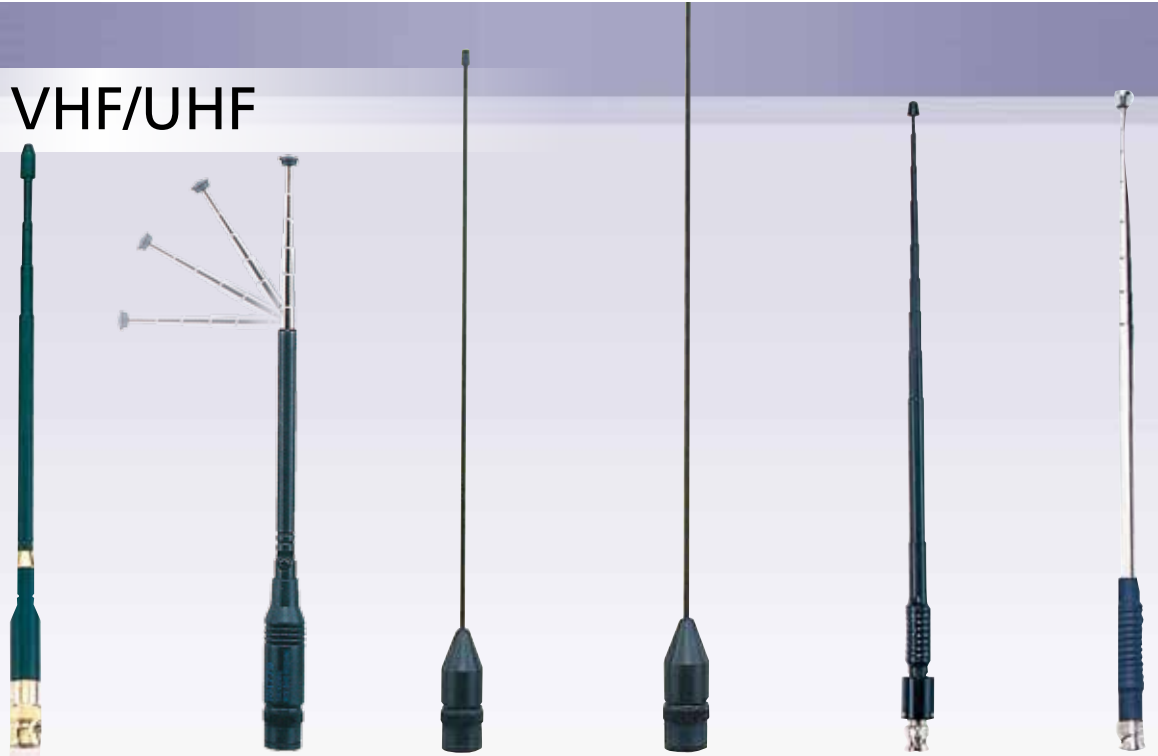

	DB-3216	DB-3219	DB-3213	DB-3214	DB-3205	DB-3207
Frequency	144/430MHZ	144/430MHZ	144MHZ	144/430MHZ	144-146MHZ	144-146MHZ
Gain	3dB	2.15dB	2.15dB	2.15dB	3dB	2.15dB
V.S.W.R.	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	50W	20W	10W	10W	20W	20W
Length	0.25m	0.21m	0.23m	0.36m	0.23m	0.23m
Weight	50g	35g	15g	20g	110g	90g
Mounting	"BNC"	"BNC"	"BNC"	"BNC"	"BNC"	"BNC"

DB - VHF/UHF

	DB-3208	DB-3210	DB-3212	DB-3217	DB-3222	DB-3223
Frequency	144-146MHZ	144-146MHZ	144-146MHZ	144-146MHZ	144MHZ	144-146MHZ
Gain	2.15dB	2.15dB	3dB	3dB	3dB	2.15dB
V.S.W.R.	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	20W	10W	20W	20W	20W	10W
Length	0.30m	0.30m	0.23m	0.17m	0.14m	0.17m
Weight	80g	30g	100g	50g	30g	50g
Mounting	"BNC"	"BNC"	"BNC"	"BNC"	"BNC"	"BNC"

DB - VHF/UHF

DB

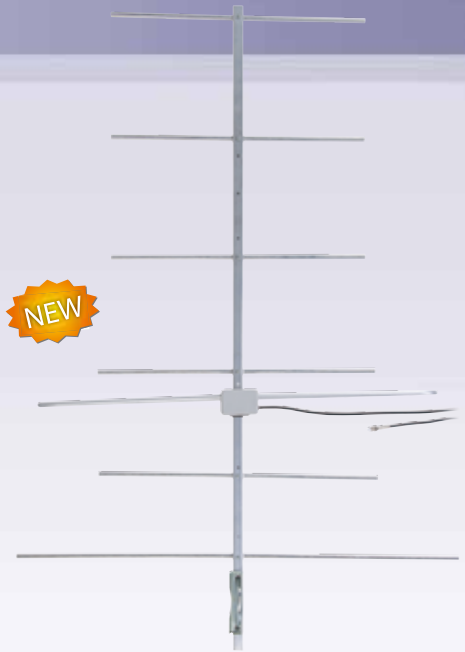

	DB-3227	DB-3228	DB-44	DB-YA450F
Frequency	433MHZ	790MHZ	144-146MHZ	440-460MHz
Gain	2.15dB	3dB	2.15dB	9dBi
V.S.W.R.	1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	10W	10W	10W	200W
Wind				100m/sec
Length	0.08m	0.11m	0.12m	0.85m
Weight	30g	50g	25g	760g
Sections				7
Mounting	"BNC"	"BNC"	"BNC"	"FME"

Base Station Antenna

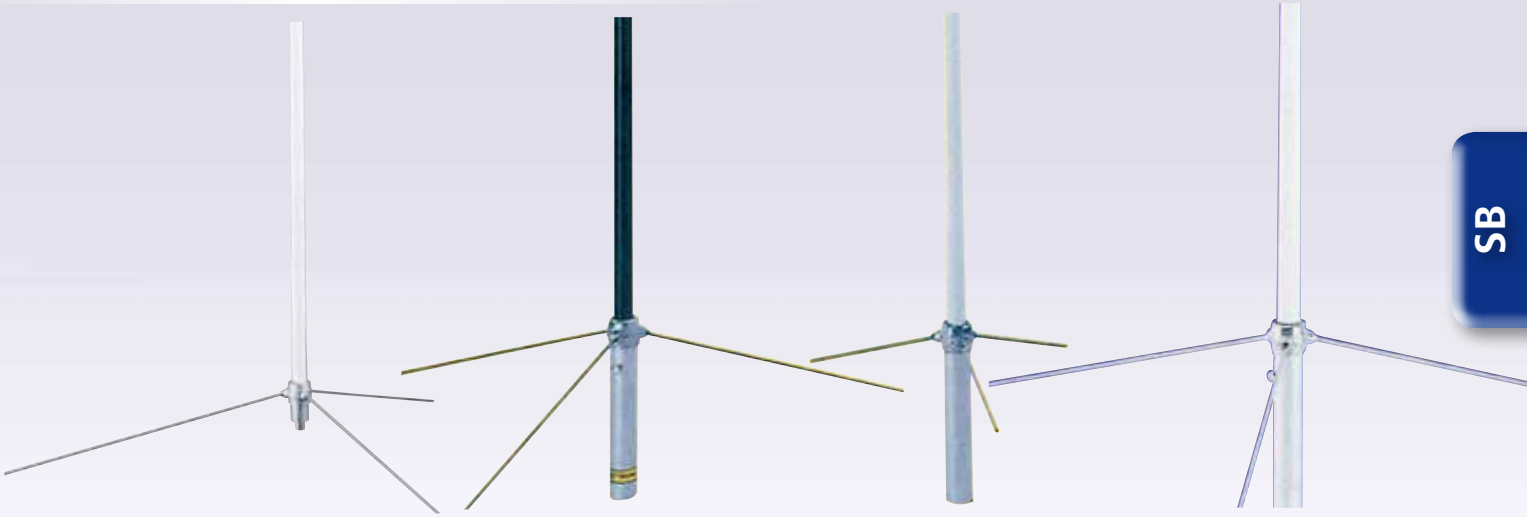

	BS-200 LL	BS-101-1	BS-102-1	BS-201
Frequency	320-380MHZ	132-174MHZ	144/430MHZ	144/430MHZ
Gain	5.5dB	8.3dB	3.0/5.5dB	6.5/9.0dB
V.S.W.R.	1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm
Max Power	200W	150W	200W	200W
Wind	60m/sec	40m/sec	60m/sec	40m/sec
Length	1.70m	2.56m	1.30m	3.10m
Weight	0.90kg	2.0kg	0.8kg	1.5kg
Connector	PL259	PL259	PL259	PL259
Sections	1	1	1	2
Mounting	"M"	"M"	"M"	"M"

Base Station Antenna

SB

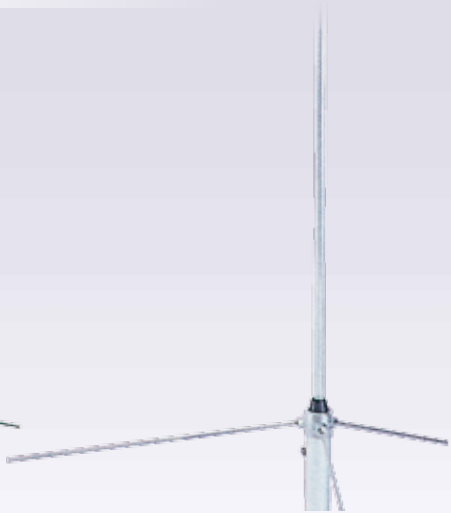

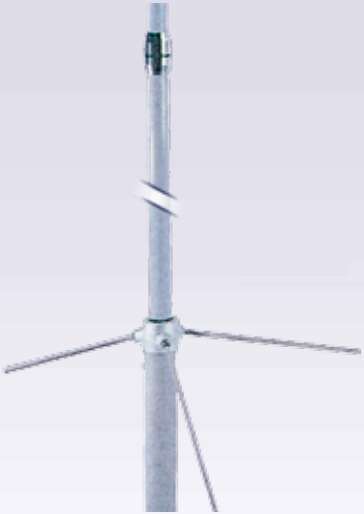

	BS-203	BS-22	BS-301
Frequency	254-380MHZ	144-146MHZ	144/430MHZ
Gain	4.16/5.5dB	5.5dB	8.3/11.7dB
V.S.W.R.	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm
Max Power	200W	150W	200W
Wind	60m/sec	40m/sec	40m/sec
Length	1.50m	3.50m	5.20m
Weight	0.9kg	1.3kg	2.2kg
Connector	PL259	PL259	PL259
Sections	2	2	3
Mounting	"M"	"M"	"M"

Base Station Antenna

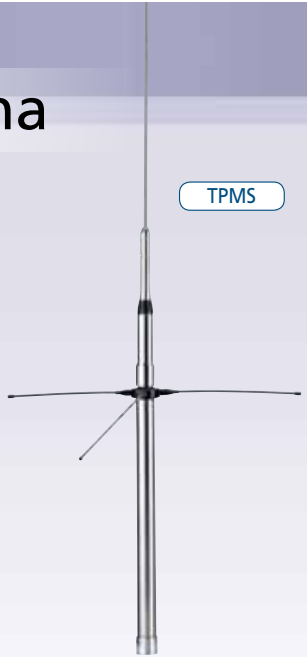

TPMS

	BS-302-1	BS-DB-18X
Frequency	144-146MHZ	430-435MHZ
Gain	7.8dB	3dB
V.S.W.R.	1.5:1	<1.5:1
Impedance	50 ohm	50 ohm
Max Power	200W	150W
Wind	40m/sec	--
Length	4.60m	0.68m
Weight	1.6kg	340g
Connector	PL259	--
Sections	3	--
Mounting	"M"	"M"

DVB-T

TV

	TV-M22RT	TV-M22IEC	TV-M36IEC	TV-M50F	TV-M66F
Frequency	172-860MHZ	470-860MHZ	174-230/470-860MHZ	174-230/470-860MHZ	550-620MHZ
Gain	3dB	0dB	3dB	5dB	3dB
V.S.W.R.	<1.5:1	<1.6:1	<1.6:1	<1.6:1	<1.6:1
Impedance	75 ohm	50 ohm	50 ohm	75 ohm	75 ohm
Connector	SMA/M	IEC, F	IEC, F	IEC, F	IEC, F
Cable	RG-174A/U	RG-174A/U	RG-174A/U	RG59U	RG-59U
Base	22mm	22mm	36mm	77/48mm	77mm

DVB-T



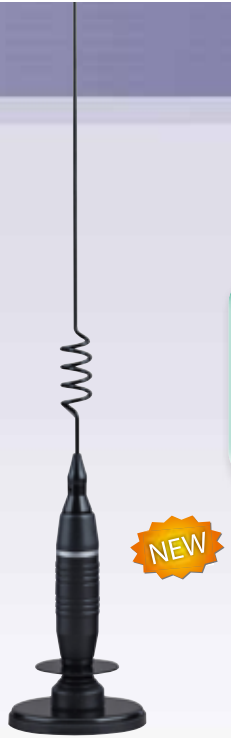

	TV-M80F	TV-PA01IEC	TV-M1322A	TV-M1348	TV-M1349
Frequency	550-620MHZ	150-360/480-650/705-860MHZ	500~620MHZ	500~620MHZ	470-860MHZ
Gain	3dB	2.5dB	3dB	3dB	5dB
V.S.W.R.	<1.6:1	<1.6:1	<1.5:1	<1.5:1	<1.5:1
Impedance	75 ohm	50 ohm	75 ohm	75 ohm	75 ohm
Connector	IEC, F	IEC, F	F	F	F
Cable	RG-59U	RG-174A/U	RG-59U	RG-59U	RG-59U
Base	77mm	3M Tape	70mm	70mm	77mm

DVB-T

TV

	TV-M88F	TV-M9411F	TV-YA04F	TV-P888F
Frequency	174~230/470~860MHZ	500-620MHZ	500-620MHZ	470~860Mhz
Gain	3dB	3dB	5dB	2dB
V.S.W.R.	<1.5:1	<1.5:1	<1.6:1	<2.0:1
Impedance	75 ohm	50 ohm	50 ohm	50 ohm
Connector	F	F	FME/F to F/F (Pigtail)	F
Cable	RG-59U	RG-174A/U	RG-58U	1.5C-2V
Base	77mm	77mm	U-Bolt	3M Tape

Magnetic Mount

MT-1301
PL259 Diameter: 120mm

MT-1302
PL259 Diameter: 90mm

MT-1303
PL259 Diameter: 145mm

MT-1306
PL259 Diameter: 120mm

MT-1307
PL259 Diameter: 116mm

MT-1308
PL259 Diameter: 111mm

MT-1309
PL259 Diameter: 155mm

Magnetic Mount



MT-1310
PL259 Diameter: 80mm

MT-300
PL259 Size: 235 x 235mm

MT-707M
PL259 Diameter: 100mm

MT-1BM
PL259 Diameter: 120mm

MT-1COMET
PL259 Diameter: 110mm

MT-800M
PL259 Diameter: 105mm

MT-1303DV
PL259 Diameter: 145mm

MT-1302DV
PL259 Diameter: 90mm

Trunk Mount

MT-199
Hole: 12mm



MT-3201
Hole: 12mm

MT-3203
PL259 Diameter: 12mm

MT-3302-1
PL259 Diameter: 12mm

Bumper Mount

MT-85B
Hole: 11mm

MT-90
Hole: 11mm

Gutter Mount

MT-3301
Hole: 11mm

MT-3202
Hole: 11mm

MT-500
Hole: 11mm

MT-6201
Hole: 12mm

MT-100
Hole: 12mm



TR-606BASE
PL259 Hole: 12mm

MT-3206B
PL259 Mount by Screw

Accessories

BXB-C238B5
DV Mount

BXB-C2310M/DVB3
DV Mount

AC-PL/PL
PL/PL

PL(RA)/TWIST
PL (Angular)

AC-ADP1
NMO Mount

AC-NMO
NMO with RG58 Cable

AC-403M
Threads: 3/8"x 24

CB-2331UP/MT-B
M Mount

Accessories

AC-01STD
Hole: 11mm

AC-04CHEV
Hole: 11mm

AC-04DODGE
Hole: 12mm

AC-05MAST

AC-05Z

AC-05BULL

AC-ADP-UHF
Adaptor

Accessories



HT-322
Stripping Tool

HT-314
Crimping Tool

HT-336FM
Crimping Kit

Connectors / Adaptors

Connector

HB-200101	HB-250102	HZ-BMBM02	HZ-UFTF02	HZ-BFBF02
				
Bnc Male Crimp	Bnc Male Crimp	Bnc Male to Male	Tnc Female to Uhf Female	Bnc Female to Female

HZ-UMTM02	HN-020101F	HN-020101	HF-060102	HZ-BFMONO02
				
Tnc Male to Uhf Male	N Female Panel	N Female Crimp Type	F Connector	Bnc Female to 2.5 Mono Male

HZ-TMBM02	HA-040102	HU-010102	HZ-UMBF02	HU-090102F
Bnc Male To Tnc Male	Uhf Male Crimp Type	Mini Uhf Female Crimp Type	Uhf Male To Bnc Female	Right Angle Uhf Female

Fabricating CB antennas





Citizens Band Frequencies and CB Antenna Requirements

Citizens Band frequencies are at the top end of the high-frequency band, or stated another way, just below the bottom end of the VHF band. Here is where base-loaded CB antennas usually work well. A mobile antenna should be placed in the middle of the vehicle roof to make best use of the ground plane. The longer the CB whip, the better the performance. The more you load an antenna, the shorter it gets, and the lower the radiation resistance. Lower radiation resistance means less signal output and input. Select the tallest antenna possible and put it as high as possible.

EVERCOM COMMUNICATION TECHNOLOGY CO., LTD.

NO. 108 JIESIN STREET TAOYUAN CITY 33063, TAIWAN, R.O.C

Tel: +886-3-376-5678

Fax: +886-3-376-5319

E-mail: service@evercomtech.com

evercom@ms17.hinet.net

http: www.evercomtech.com

www.evercom.com.tw

www.globalsources.com/evercomtech.co

2013/14